


# Data Sheet

## Gravel Retainer ZP-A Alu 1 mm

Punched gravel retainer as an L-bracket without drill holes in the base for connecting to the roof membrane and folded edges to provide stability and prevent cuts and other injuries.

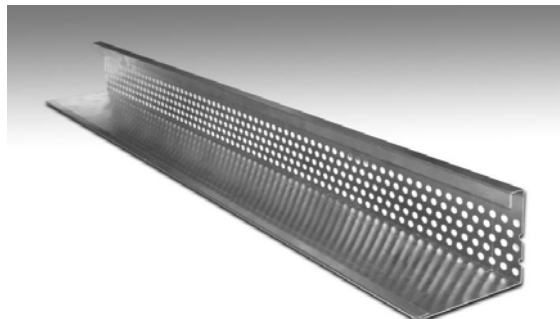

### Technical data and properties:

**Material:** Aluminium 1 mm  
**alternatively on request:** V2a stainless steel

**Colour** Plain aluminium

### Special properties:

- Smooth surface
- Held by superimposed load
- Quadruple folding
- Water drains through punched holes in the vertical flank

<b>Variants:</b>	<b>ZP 80</b>	<b>ZP 100</b>	<b>ZP 120</b>
Height	80 mm	100 mm	120 mm
Width	140 mm	120 mm	140 mm
Length	2500 mm	2500 mm	2500 mm

**Accessories** Butt connector for longitudinal joints

### Delivery form:

In bulk on pallets or piece goods via courier

**Quantity per packaging unit:** Individual uncut profile lengths of 2.5 m

### Storage:

Flat, dry, protected from acid and alkaline

### Area of use:

- As separating elements between substrate, gravel edging and / or surface paving
- As a permeable upturn on the eaves of single pitch roofs with up to 5% maximum incline (e.g. Carport)
- Not suitable as a statically effective gravel strip on pitched roofs with > 5% incline

### Processing:

- Align on protective surface and secure with ballast
- Secure against slippage when used as an upturn on eaves

*The preceding details are guideline values established under laboratory conditions. These values are subject to a certain manufacturing tolerance. The data contained in this product information sheet represents Optigreen's technical knowledge at the time of publication. Optigreen reserves the right to change and update details in accordance with new insights and to modify specified properties accordingly. Errors and omissions excepted.*